


# PM-625 PHOS-OUT

## PHOSPHATE REMOVER

**PM-625 PHOS-OUT** is a product that removes phosphates and makes pool maintenance easier. Phosphates are generated in bigger amounts in swimming pools treated with salt chlorinators or activated oxygen equipment. For this reason we recommend to analyze its concentration at the beginning of the season with phosphate kit and if there is presence (more than 100 ppb), apply a treatment of Phos-out.

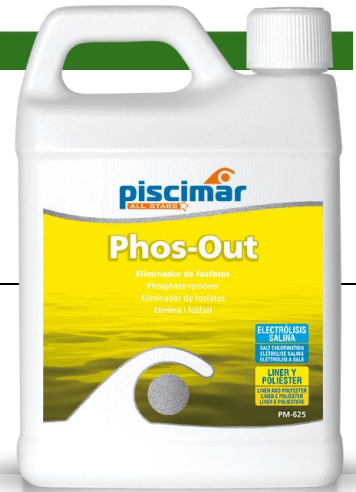

### METHOD OF USE AND DOSAGE:

- If algae are present, remove them before doing the treatment.
- Dosage: Test the level of phosphates with Insta-Test Phosphate.
- Calculate the dose according to the volume of the pool and the level of phosphates, as the following instructions:

Phosphate level	Dosage
200 ppb	0.3 L/100 m <sup>3</sup>
500 ppb	0.6 L/100 m <sup>3</sup>
1000 ppb	1.2 L/100 m <sup>3</sup>
More than 2500 ppb	2.4 L/100 m <sup>3</sup>

- Shake vigorously the container prior to adding the product to the pool. Add the product well distributed throughout the pool.
- Immediately after the addition of the product, add PM-613 GOLDENFLOK to eliminate the turbidity formed and filter for 24 hours.
- After 24 – 48 hours, the level of phosphates can be measured.
- Maintenance: Add 0.3 L/100 m<sup>3</sup> of water weekly.

### PHYSICAL PROPERTIES:

- Appearance: Colourless to whitish liquid
- Odour: Odourless
- pH: 9.0 – 11.0
- Density: 1.100 - 1.125 g/cm<sup>3</sup> (20 °C)
- Solubility in water: Miscible in water in all proportions

### PRECAUTIONARY STATEMENTS:

- Keep out of reach of children.
- Do not get in eyes, on skin, or on clothing.
- Do not eat, drink or smoke when using this product.
- Call a poison centre or doctor/physician if you feel unwell.

### PACKAGING:

1.2, 6 Kg cans